

Tandberg 770MXP Quick Sheet

System Start-up

1. Turn on the white power strip (right-hand side of cabinet)



2. Verify the Tandberg has power. Two lit LEDs indicate power. If no power, push the rocker switch located on the back right of the codec




Rocker Switch located on the back right-hand side

3. Turn on the plasma. There are 2 power buttons located under the lower edge of the plasma below the ON/OFF icons on the plasma.



Turn on first
Lower left-hand side of plasma

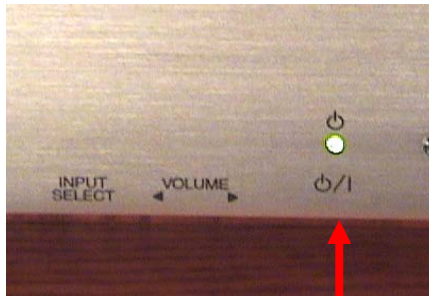

Turn on second
Lower right-hand side of plasma

4. Place microphone in desired location

To make a call

1. Press the Directory button on the Tandberg remote to bring up the phone book
2. Scroll to the desired entry using the up/down arrows on the remote
3. Press Connect to dial the selected entry

If desired entry is not in the Directory:

1. Press Connect
2. Enter the IP-address of the unit you wish to call. Use the * • button to insert the dots in the IP-address. To delete the last digit (or character) entered, press Delete.
3. Press Connect



Tandberg 770MXP Quick Sheet

To answer a call

1. The system is currently set to automatically answer. However, if the system does not auto answer, press the **CONNECT** or **OK** button

To view Computer

1. Boot up and log on to computer
2. Push the blue **PRESENTATION** button on the Tandberg remote to display the computer.
3. Use the wireless keyboard, mouse, and remote for presentations (stored in the plasma cabinet). **Note:** the plasma will act as the computer monitor/display
4. To connect a laptop, contact an A/V or IT Technician



General use

ADJUSTING VOLUME

Press the **+ / - VOLUME** keys

PICTURE-IN-PICTURE (PIP)

Push the **LAYOUT** button to view PIP. Continue pushing the **LAYOUT** button to move the PIP to different corners of the screen or to switch it off

CONTROLLING THE CAMERA

Hide the menu by pushing the cancel (X) button. Use the arrows to pan /tilt the camera. Push OK when finished



To end a call & shut down system

1. Press the **DISCONNECT** button once, press the **DISCONNECT** button again (or the **OK** button) to confirm
2. Do the opposite of "System Startup" directions to shut system down.